


CEILING UNIVERSAL TYPE AIR-CONDITIONER

Enter a fresher world with Fujiaire's sleek ceiling universal type air-conditioner.

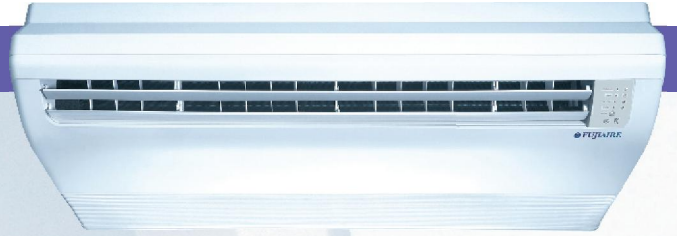

Your World Made Cooler


 **FUJIAIRE**
AIR · C O N D I T I O N E R S



To provide full fresh coolness and circulation to every corner.

SPECIFICATIONS

- All specifications are subject to change by the manufacturer without prior notice.
- Performance of the unit varies according to the type of compressor used.
- Nominal cooling capacities are based on the following conditions:
Cooling: 27°C DB / 19°C WB Indoors
35°C DB / 24°C WB Outdoors



FUJIAIRE CEILING UNIVERSAL TYPE AIR-CONDITIONER

Model	Indoor Unit		FEA20C1A	FEA25C1A	FEA30C1A
	Outdoor Unit		FLA20C1A	FLA25C1A	FC-3016
Cooling Capacity	Btu/hr		20,000	25,000	30,000
	W		5,860	7,325	8,790
Power Source	V / Ph / Hz		220-240 / 1 / 50		
Cooling	Rated Power Input	W	1,960	2,511	3,200
	Rated Current	A	9.1	12.2	14.8
Air Flow	Indoor (Hi)	CFM	500	700	950
Energy Efficiency Ratio	EER	Btu/W.hr	10.20	9.96	9.38
Control System	Refrigerant / Flow Control	Type	R22 / Outdoor Capillary Tube		
	Operating Control	Type	Wireless Remote Controller (Standard) / Wired Remote Controller (Optional)		
Air Filter System	Type	Washable Saran Net			
Temperature Control	Type	Microprocessor I/C Thermostat			
Timer	Type	24-Hours Timer			
Compressor	Type	Rotary			
Refrigerant Pipe Size	Gas	mm (Inch)	12.70 (1/2")	15.88 (5/8")	15.88 (5/8")
	Liquid	mm (Inch)	6.35 (1/4")	9.52 (3/8")	9.52 (3/8")
Noise Level	Indoor (Hi/Me/Lo)	dB(A)	48 / 34 / 38	48 / 43 / 39	48 / 43 / 39
	Outdoor	dB(A)	55	56	58
Net Unit Dimension (WxHxD)	Indoor	mm	882 x 203 x 635	1245 x 235 x 680	1245 x 235 x 680
	Outdoor	mm	850 x 606 x 306	872 x 700 x 319	900 x 841 x 336
Packing Dimension (WxHxD)	Indoor	mm	980 x 301 x 715	1325 x 325 x 770	1325 x 325 x 770
	Outdoor	mm	995 x 690 x 415	990 x 780 x 410	1030 x 960 x 440
Net Weight	Indoor	kg	30	35	35
	Outdoor	kg	40	53	79
Gross Weight	Indoor	kg	32	41	41
	Outdoor	kg	45	60	89

Model	Indoor Unit		FEA40C1A	FEA50C1A	FEA60C1A
	Outdoor Unit		FLA40C1A	FLA50C1A	FLA60C1A
Cooling Capacity	Btu/hr		40,000	50,000	60,000
	W		11,720	14,650	17,580
Power Source	V / Ph / Hz		380-415 / 3 / 50		
Cooling	Rated Power Input	W	4,000	4,720	5,750
	Rated Current	A	7.2	8.1	9.6
Air Flow	Indoor (Hi)	CFM	1,352	1,352	1,352
Energy Efficiency Ratio	EER	Btu/W.hr	10.00	10.59	10.43
Control System	Refrigerant / Flow Control	Type	R22 / Accurator		
	Operating Control	Type	Wireless Remote Controller (Standard) / Wired Remote Controller (Optional)		
Air Filter System	Type	Washable Saran Net			
Temperature Control	Type	Microprocessor I/C Thermostat			
Timer	Type	24-Hours Timer			
Compressor	Type	Scroll			
Refrigerant Pipe Size	Gas	mm (Inch)	19.05 (3/4")	19.05 (3/4")	19.05 (3/4")
	Liquid	mm (Inch)	9.52 (3/8")	9.52 (3/8")	9.52 (3/8")
Noise Level	Indoor (Hi/Me/Lo)	dB(A)	50 / 47 / 44	50 / 47 / 44	52 / 48 / 45
	Outdoor	dB(A)	60	60	60
Net Unit Dimension (WxHxD)	Indoor	mm	1670 x 235 x 680	1670 x 235 x 680	1670 x 235 x 680
	Outdoor	mm	1000 x 995 x 347	1000 x 995 x 347	911 x 1335 x 350
Packing Dimension (WxHxD)	Indoor	mm	1750 x 335 x 780	1750 x 335 x 780	1750 x 335 x 780
	Outdoor	mm	1150 x 1120 x 475	1150 x 1120 x 475	965 x 1445 x 400
Net Weight	Indoor	kg	47	47	47
	Outdoor	kg	92	94	99
Gross Weight	Indoor	kg	54	54	54
	Outdoor	kg	100	102	110

FUJIAIRE (MALAYSIA) SDN. BHD. (184159-M)

No. 14 & 16, Jalan PS 9, Prima Selayang, 68100 Batu Caves, Selangor Darul Ehsan, Malaysia.

Tel: 603-6185 8032 / 6137 6366 Fax: 603-6185 8036 / 6137 9166 Website: www.fujiaire.com.my Email: enquiry@fujiaire.com.my

Toll freeline: 1 800 88 FUJI (3854)